


Technical Specifications


Dimensional tolerances	Type	EPS	EN 13950
Thickness: $\pm 0,5$ mm		H1	EN 520
Width: $+0/-4$ mm	Reaction to fire gypsum plasterboard	A2-s1,d0	EN 520
Length: $+0/-5$ mm	Reaction to fire EPS	B-s1, d0	EN 13950
	Thermal conductivity gypsum	$W/(m \cdot ^\circ C)$ 0.25	EN ISO 10456
	Thermal conductivity EPS	$W/(m \cdot ^\circ C)$ 0.036	EN 12667
	Densidade placa gesso laminado	kg/m^3 ≥ 660	
	Densidade EPS	kg/m^3 ≥ 20	

Application

Wall linings



Partitions



Dimensões

Thickness:	mm	12.5+20 12.5+30 12.5+40 12.5+50 15+20 15+30 15+40 15+50
Width:	mm	1200
Length:	mm	2500

Approximate weight

12.5 mm + 20/30/40/50 mm	kg/m^2	8.80 + 0.4/0.6/0.8/1.0
15 mm + 20/30/40/50 mm	kg/m^2	11.28 + 0.4/0.6/0.8/1.0

Breaking loads


Board Thickness		12.5	15
Longitudinal	N	≥ 550	≥ 650
Transversal	N	≥ 210	≥ 250

Edge type

Tapered Edge - TE

GYPSUM
PLASTERBOARD

EPS BOARD

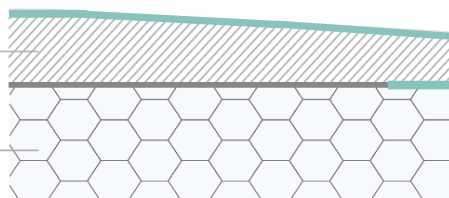

This board has a water-repellent treatment, but is not recommended for use in direct contact with water, nor in environments with permanent high humidity. It can be covered with ceramic or similar material.

Size (mm)

