


AENOR

GESTÃO
DE QUALIDADE
ISO 9001



EUROGYPSUM

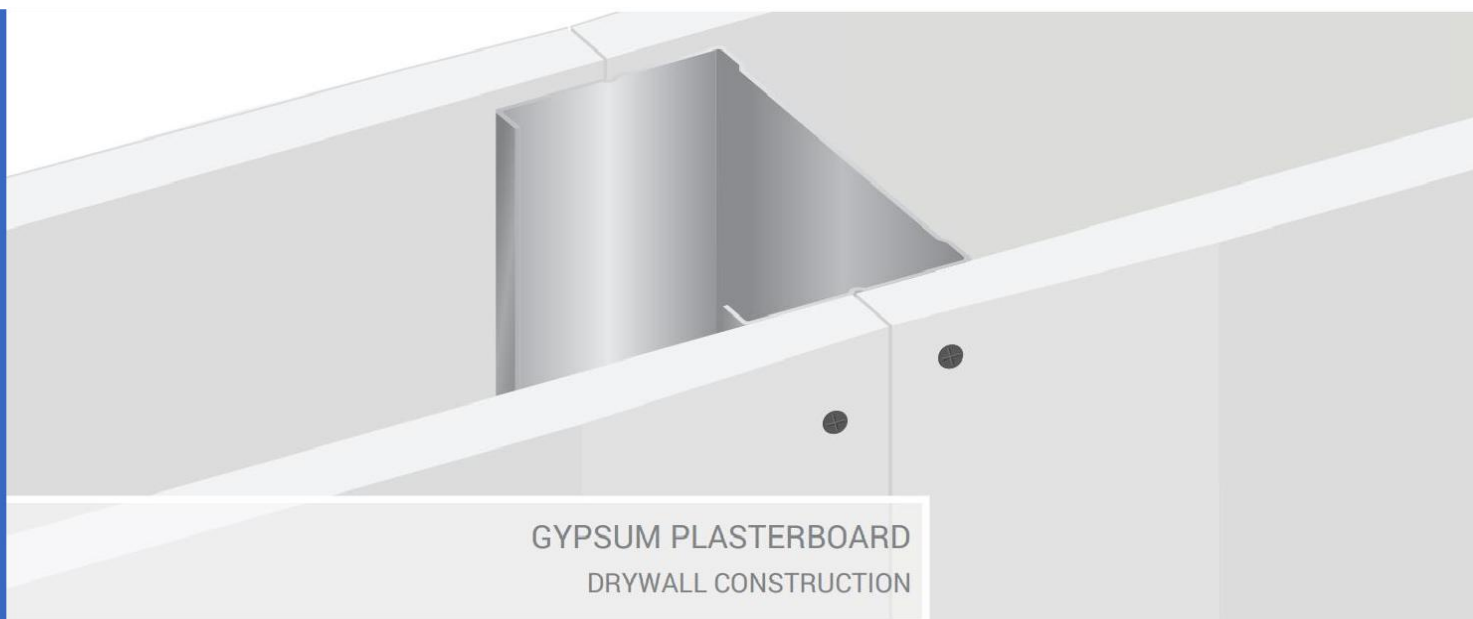

GYPSUM PLASTERBOARD
DRYWALL CONSTRUCTION



STANDARD

Application

The GYPFOR STANDARD plasterboard is designed for use in interior wall and ceiling applications. Should not be used in applications where temperatures exceed 52 °C for extended periods, or in areas with extreme humidity.

Enhanced quality board for generic requirements in drywall construction with an efficient thermal and acoustic insulation. Flexible and adaptable to any type of project. Suitable for:

- Suspended Ceilings
- Partition walls
- Existing wall linings

Physical Characteristics

Board type

EN 520:2004+A1:2009 A

Core

Non-combustible, dimensionally stable, inert gypsum

Paper

100% recycled, colour ivory

Longitudinal Edge

Tapered edge (TE)
Square edge (TE)

Transversal Edge

Square edge (TE)

Label colour

Black


Gypsum board primer should be applied before painting or adding any textural material.

**Technical Specifications**Dimensional tolerances


Thickness:	±0.5 mm
Width:	+0/-4 mm
Length:	+0/-5 mm

Application


Wall linings



Ceilings



Partitions



Type

STANDARD

Reaction to fire		A	EN 520
Thermal conductivity		A2-s1,d0	EN 520
Density		0.25	EN ISO 10456
Dimensions		≥ 660	
Thickness	mm	12.5	
Width	mm	900	
Length	mm	1800	
Approximate weight			
Board thickness 12.5 mm	kg/m ²	8.00	
Breaking loads			EN 520
Thickness		12.5	
Longitudinal	N	≥550	
Transversal	N	≥210	

Edge

Tapered Edge - TE



This board is not suitable for direct contact with water or for permanent high humidity areas. GYPFOR STANDARD has some inherent fire-resistance characteristics, however it should not be used to provide the maximum levels of fire resistance that some applications require.

Sizes (mm)

To maintain GYPFOR STANDARD performance integrity, the drywall plasterboard should be protected from exposure to adverse conditions during storage and construction.