


AENOR

GESTÃO
DE QUALIDADE
ISO 9001



EUROGYPSUM

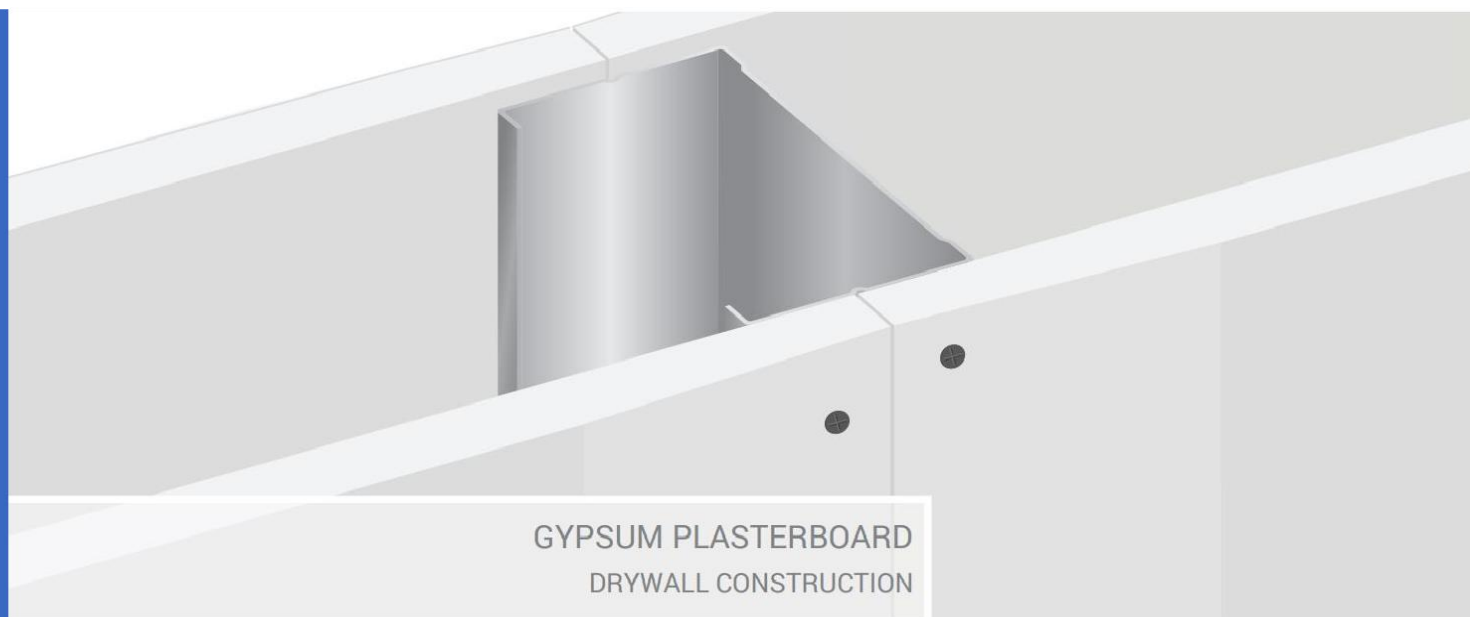

STANDARD

Application

The GYPFOR STANDARD plasterboard is designed for use in interior wall and ceiling applications. Should not be used in applications where temperatures exceed 52 °C for extended periods, or in areas with extreme humidity.

Enhanced quality board for generic requirements in drywall construction with an efficient thermal and acoustic insulation. Flexible and adaptable to any type of project. Suitable for:

- Suspended Ceilings
- Partition walls
- Existing wall linings

Physical Characteristics

Board type

EN 520:2004+A1:2009 A

Core

Non-combustible, dimensionally stable, inert gypsum

Paper

100% recycled, color ivory

Longitudinal Edge

Tapered edge (TE)
Square edge (TE)

Transversal Edge

Square edge (TE)

Label colour

Black


Gypsum board primer should be applied before painting or adding any textural material.

**Technical Specifications**Dimensional tolerances


Thickness:	±0.5 mm
Width:	+0/-4 mm
Length:	+0/-5 mm

Application


Wall linings



Ceilings



Partitions



Type

STANDARD

		A	EN 520
Reaction to fire		A2-s1,d0	EN 520
Thermal conductivity	$W/(m \cdot ^\circ C)$	0.25	EN ISO 10456
Density	kg/m^3	≥ 630	
Dimensions			
Thickness	mm	6, 9.5, 12.5, 15, 18	
Width	mm	1200	
Length	mm	Several	

Approximate weight

Board thickness 6 mm	kg/m^2	6.30
Board thickness 9.5 mm	kg/m^2	6.50
Board thickness 12.5 mm	kg/m^2	8.00
Board thickness 15 mm	kg/m^2	10.00
Board thickness 18 mm	kg/m^2	11.60

Breaking loads

EN 520

Thickness		6	9.5	12.5	15	18
Longitudinal	N	≥258	≥400	≥550	≥650	≥774.0
Transversal	N	≥101	≥160	≥210	≥250	≥302.4

Edge

Tapered Edge - TE



Square Edge - SE



This board is not suitable for direct contact with water or for permanent high humidity areas. GYPFOR STANDARD has some inherent fire-resistance characteristics, however it should not be used to provide the maximum levels of fire resistance that some applications require.

Sizes (mm)

